

NEW
**VUC
1021**

EASY-TO-USE STILL DRYER

***Best suited for wet-laundries
with an air volume controller
and a shelf board for flat drying***

A FEATURES OF VUC 1021

Inverter controlled air volume

Easy-to-use dialer for air volume adjustment on the operation panel.
Prevent blouses from curling up.
Best air volume is available for the article.

***A shelf board for flat drying
standard configuration.***

Suitable for drying knits and hats.


Door windows

Large door windows for monitoring inside the dryer.



STILL DRYER
VUC SERIES

Dimensions

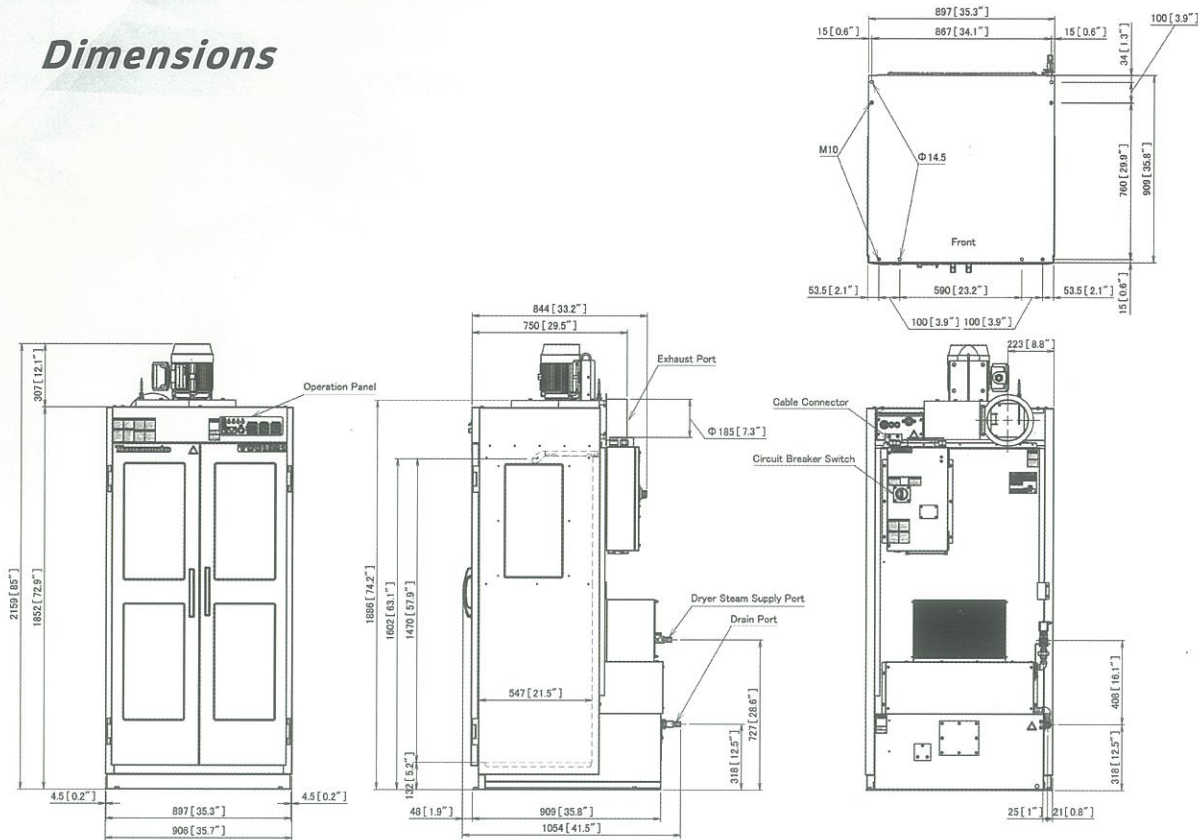

MODEL		VUC 1021	
Capacity		10 Clothes	
MACHINE SIZE (Packing Size)	Height	2159mm	85"
	Width	906mm	35.7"
	Depth	1038mm	40.9"
Weight of empty machine (Crated Weight)		215kg	478lbs
POWER	Electrical phase / Voltage / Frequency	3phase, AC200 - 230V, 60Hz	
	Full load current	4A	
Minimum Supply-Circuit Conductor Ampacity		10A	
Maximum Rating of Supply Circuit Overcurrent Protective Device		10A	
Motor Size	Fan	1.5HP (1.1kW)	
Heating system of the dryer		Steam	
DRYER STEAM	Supply Port	1/2NPT	
	Drain Port	1/2NPT	
	Pressure	0.4-0.6MPA, 58-87psi, 4-6bar	
Duct Diameter		φ 200mm	7.87"
Steam Consumption		40kg/H	89lbs/H
USAGE ENVIRONMENT	Temperature of Surrounding	5-45°C	41-113°F
	Humidity	30-85%	
	Altitude	The machine should be installed in the altitude which is lower than 3280 ft.	

DISTRIBUTOR



Yamamoto Japan Inc., a subsidiary of Yamamoto Manufacturing Co., Ltd.
 IOIO Aspen Drive Smithville, MO 64089 Tel: 866-204-0519
 E-mail: americasales@onomichi-yamamoto.co.jp
 1-220-19, Chojagahara, Onomichi, Hiroshima 722-0221, Japan
 Tel: +81-848-48-5300 Fax: +81-848-48-5310

As Of April 2015
 The information in this brochure is subject to change without notification.
 The actual color may be different from that shown in this printed brochure.